


# DURACELL®

2032  
Size: CR2032


Zn/MnO<sub>2</sub>

## Lithium-Manganese Dioxide Battery

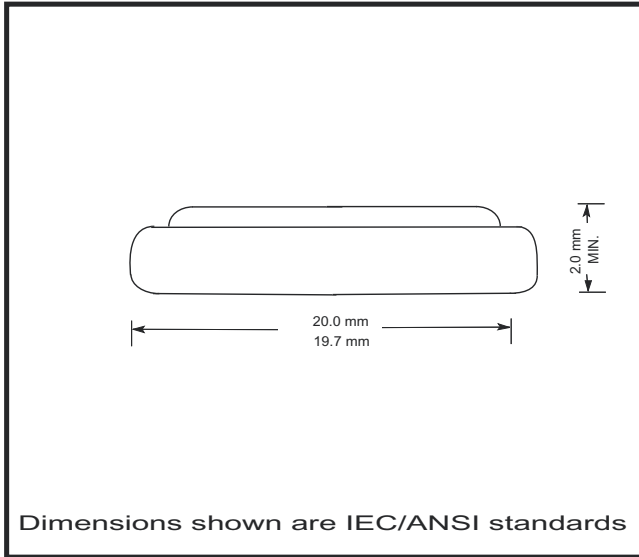


Nominal Voltage:	3 V
Average Weight:	3.14 gm (0.11 oz.)
Volume:	0.63 cm <sup>3</sup> (0.04 in. <sup>3</sup> )
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
ANSI:	5004LC
IEC:	CR 2032

Typical Discharge Characteristics at 21°C (70°F)

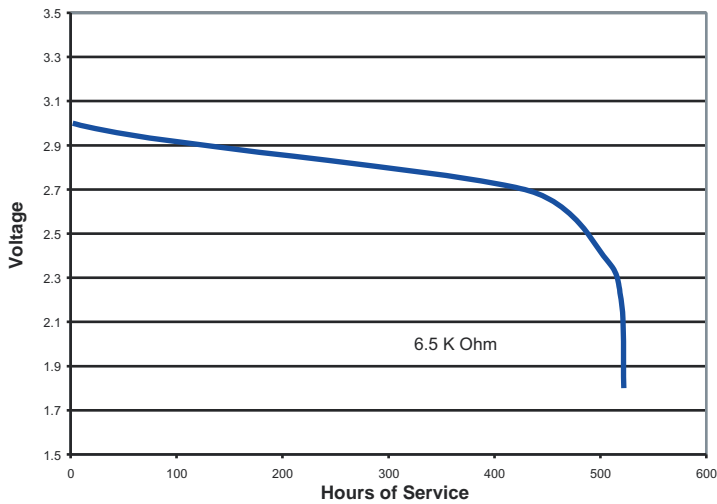

Typical Discharge Characteristics at 21°C (70°F)

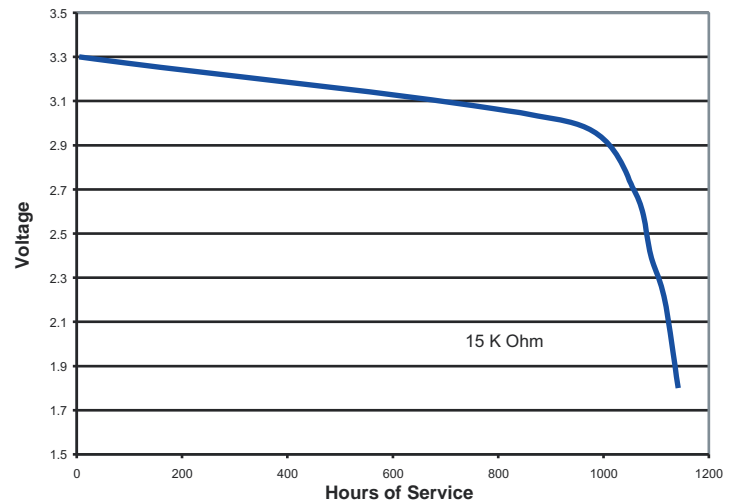

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide.