



Y-Fit

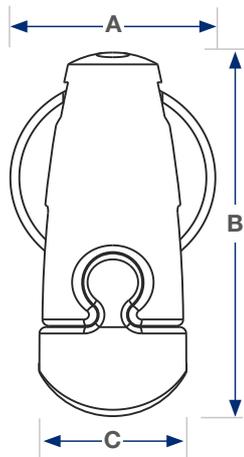

Dimension	mm
A	16.0
B	28.6
C	∅ 11.5

- Dual fixing points for balance.
- 150 mm and 300 mm leg lengths as standard.
- Available with a variety of wire end fixings e.g. Toggle, End Stop etc.


Integrated Side Hook

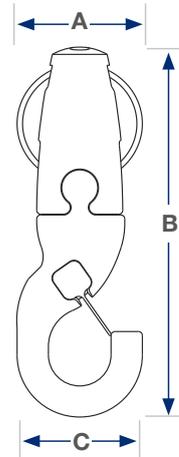

Dimension	mm
A	16.0
B	47.6
C	16.0

- Ideal for light fittings, signage, or for use with eyebolts, spring and wire anchors.
- Safety clasp for security.
- Integrated Side Hook with 2.5 mm clearance.
- Large snap hook with 9mm clearance.
- Side wire exit.


Side Exit - Female

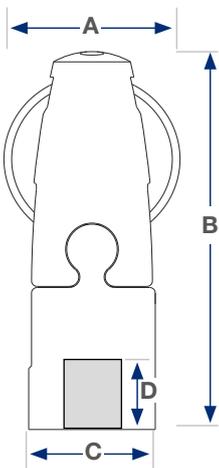

Dimension	mm
A	16.0
B	34.6
C	∅ 11.5
D	Max. 6 mm

- Threaded female foot, ideal for direct attachment to light fittings, frames and acoustic panels.
- Side wire exit.
- Available in M4, M6 and 1/4" UNC.
- Maximum insertion depth 6 mm.

Swivel

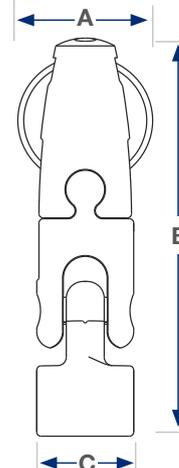

Dimension	mm
A	16.0
B	47.6
C	∅ 11.5

- Swivel feature for suspension at angles up to 90°.
- Threads available are M4, M6, M8 and 1/4" UNC.
- Female: maximum insertion depth 6 mm.
- Male: 15 mm exposed thread length as standard.

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.


BUS-PI-LIS-ANG-ENG-FEET

www.gripple.com



Gripple Ltd | The Old West Gun Works | Savile Street East | Sheffield S4 7UQ
Tel 0800 018 4264 Fax 0114 275 1155 email info@gripple.com


Side Exit - Male

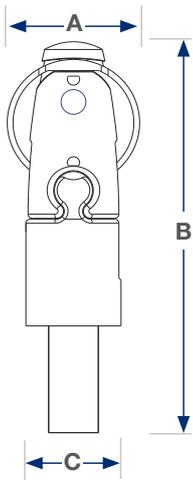

Dimension	mm
A	16.0
B	48.0
C	ø 11.5

- Threaded male foot, ideal for direct attachment to light fittings frames and acoustic panels.
- Side wire exit available in M4, M6 and ¼" UNC as standard. M5, M8, M10 and M13 adaptors available.
- 15 mm exposed thread length as standard, bespoke lengths on request.


Signage

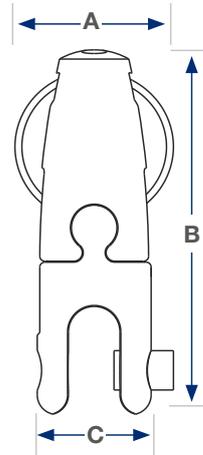

Dimension	mm
A	16.0
B	37.0
C	ø 11.5

- Ideal for signage up to 5 mm in depth.
- Grub screw for direct attachment.
- Side wire exit.
- Available with a variety of wire end fixings e.g. Toggle, End Stop etc.


Central Exit

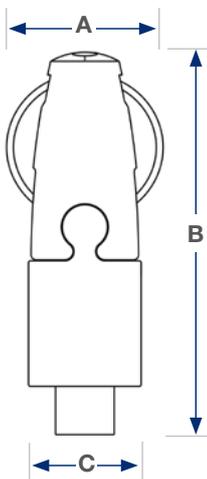

Dimension	mm
A	16.0
B	39.6
C	ø 11.5

- Threaded male foot ideal for attachment to light fittings, frames and acoustic panels.
- Central wire exit available in M6 and ¼" UNC as standard.
- 5 mm minimum exposed thread length as standard, bespoke lengths on request.

Signage Rail

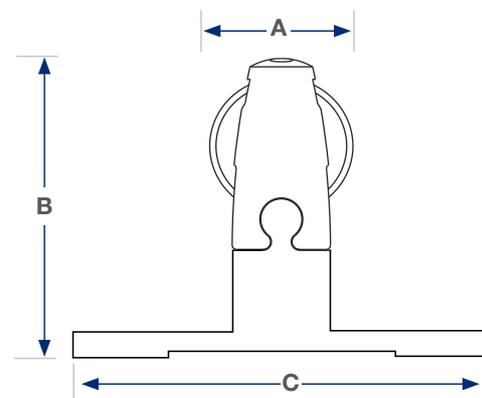

Dimension	mm
A	16.0
B	34.4
C	50.0

- Ideal for suspending signage or panels on either a rail or by screws.
- Two screw holes for direct attachment.
- Central wire exit

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.

BUS-PI-LIS-ANG-ENG-FEET

www.gripple.com



Gripple Ltd | The Old West Gun Works | Savile Street East | Sheffield S4 7UQ
 Tel 0800 018 4264 Fax 0114 275 1155 email info@gripple.com