



Pre-fabricated side loading bracket solution offering speed and flexibility for the installation of lightweight electrical containment, pipework, ductwork and other mechanical services in restricted places.

FEATURES / BENEFITS

- **Quick** – up to four times faster to install than traditional suspension systems
- **Safe** – pre-fabricated system which removes the need to cut threaded rod or channel on site
- **Tool free** – bracket can be moved up and down the tracks to accommodate changes in position during installation
- **Secure** – safety locks ensure security once brackets & tracks are in place
- **Space saver** – can be multi-tiered to accommodate additional services
- **Easy Installation** – lightweight services can be side loaded onto the bracket
- **Neat & tidy** – system can be 'stacked' on-site to reduce storage

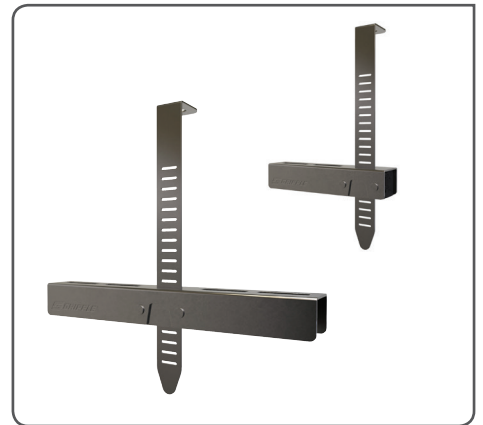


INSTALLATION & ADJUSTMENT

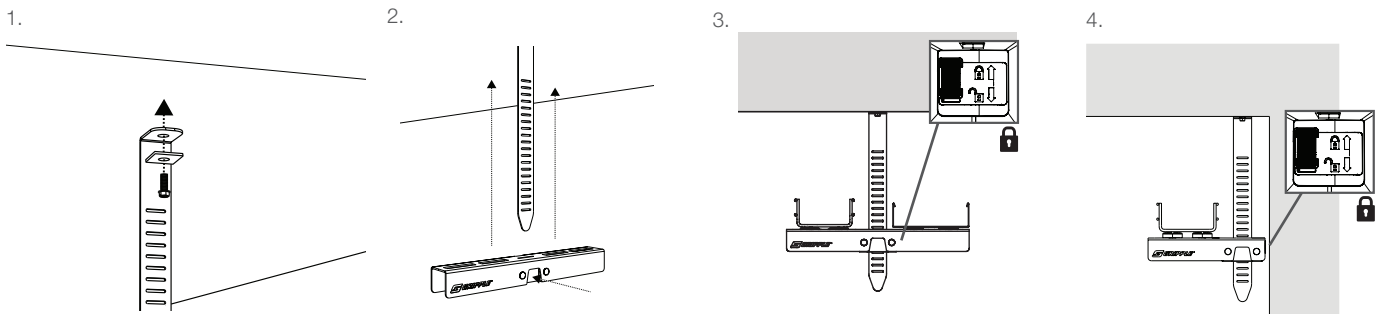


Internal applications only. Do not adjust under load. No dynamic loading.

SPECIFICATION

Single Load Bracket

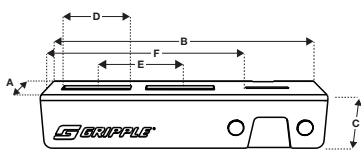


Twin Load Bracket

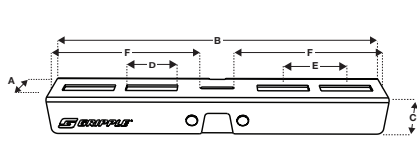

Single Load Bracket	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Max Single Point Load	Max Uniform Load (UDL)
FTBS180	40	180	35	45	55	130 mm	15 kg	15 kg (3:1)
Twin Load Bracket	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Max Single Point Load	Max Uniform Load (UDL)
FTBT200	40	210	35	60	-	2x 90 mm	15 kg	30 kg (3:1)
FTBT300	40	290	35	45	55	2x 130 mm	15 kg	30 kg (3:1)
FTBT400	40	400	35	45	55	2x 185 mm	15 kg	30 kg (3:1)

Track

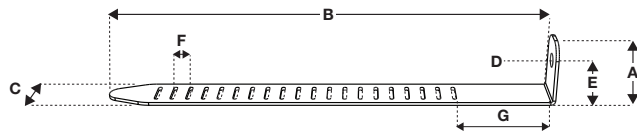

Track	A (mm)	B (mm)	C (mm)	D (Ø)	E (mm)	F (mm)	G (mm)	Safe Working Load (per track)
FTT 135	40	135	28	10.1	24	10	60	90 kg (5:1)
FTT 285	40	285	28	10.1	24	10	60	90 kg (5:1)

MOUNTING METHODS

- Shot Fire
- Drop-in Anchor
- Concrete Screw
- Wood Screw
- Wedge Anchor

Please check load ratings of fixings as these may differ to the Fast Trak system SWL.

For more options on suspension methods please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Safe Working Load:

See table in specification

Material:

Bracket – DX51D (Mild Steel)

Button – Polypropylene, Impact Copolymer

Cartridge – ABS FR

Approvals:

Lloyds certified, UL tested, APAVE tested, Fire tested by Exova to F120, TUV tested

