

## Series 3 DC311NBS

### Wireless plug-in doorbell with push button – White

Simple, reliable and hassle-free, the Honeywell DC311NBS plug-in doorbell will never need new batteries. Pre-linked and ready to go out of the box, with a reliable wireless connection and great sound quality, you know you'll never miss a visitor again..



### Pack Contents:

1 x Wireless Plug-in Doorbell, 1 x Wireless Push Button, 1 x CR2032 (3V) Battery, 1 x Quick Start Guide, 1 x Safety & Guarantee, 1 x Declaration of Conformity,

### Key Features and Benefits:


**Never miss a visitor or delivery** - Place your plug-in doorbell anywhere in your home, with Honeywell ActivLink™ technology providing a reliable wireless range of up to 150m, while the maximum volume of 80dB can be heard up to 60m away.

**Revolutionary design** - Compact and beautifully designed in a harmonising palette of white and grey, our doorbells are designed with your home in mind.

**Peace of mind** - Peace of mind for visitors, thanks to a LED confidence light on the push button, and peace of mind for you, thanks to the Secret Knock function which plays a different melody, so you know if it's a family member or friend at the door. For total peace of mind, let Honeywell ActivLink™ interconnect your doorbell with Honeywell security accessories and Home Alarm Kits to build your own bespoke home alert and alarm system.

**Reliability and Quality** - Honeywell ActivLink®, using the 868MHz frequency, is our innovative wireless protocol which delivers greater range capability, extended battery life of up to 2 years, and improved connection reliability, all supported by our 2 year product quality guarantee.

**Compact size with rich sound** - All Honeywell doorbells benefit from digitally enhanced, crystal clear sound that carries well throughout the home and garden, packing market-leading sound quality into some deceptively small packages!

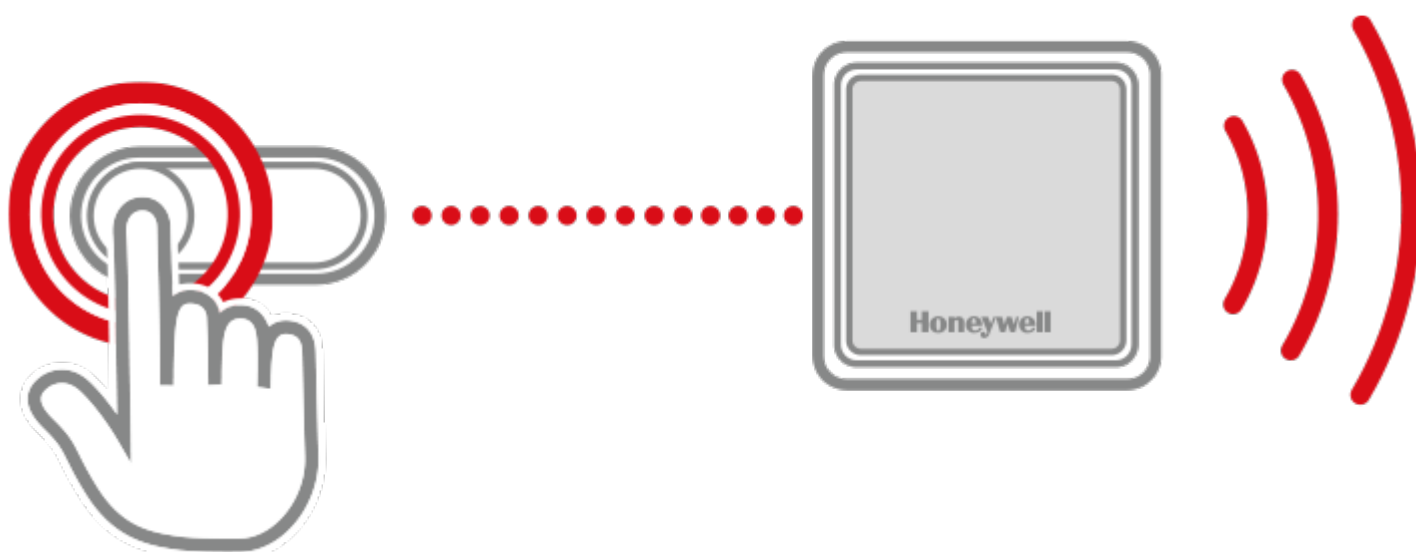

[vc\_column\_text][vc\_column\_inner][vc\_column\_inner el\_class="sounds-panel" width="1/3"][vc\_column\_text] Click on the choices to preview each melody. [vc\_column\_text][thb\_audio chime\_name="Hello" chime\_url="http://livewell.honeywell.com/honeywell\_wp/wp-content/uploads/2014/11/1-Hello.wav"] [thb\_audio chime\_name="Ding Dong"]

chime\_url="http://livewell.honeywell.com/honeywell\_wp/wp-content/uploads/2014/11/2-Ding-Dong.wav"] [thb\_audio  
chime\_name="Telephone" chime\_url="http://livewell.honeywell.com/honeywell\_wp/wp-content/uploads/2014/11/9-  
Telephone.wav"] [thb\_audio chime\_name="Soft Alert" chime\_url="http://livewell.honeywell.com/honeywell\_wp/wp-  
content/uploads/2014/11/7-Soft-Alert.wav"] [vc\_column\_inner] [vc\_row\_inner] [vc\_column] [vc\_row] [vc\_row row\_id="buy-now"  
type="full\_width\_content" css=".vc\_custom\_1427662627557{background-color: #f2f2f2 !important;}"  
parallax\_speed="1"] [vc\_column] [vc\_column\_text]

### **Easy To Install -**

All Honeywell doorbells come pre-linked and ready to install straight out of the box, with optional screw-free installation and an easy open battery compartment so you can be set up in minutes. All this is backed up by our 2 year product guarantee.

## Specification:

Wireless Plug-in Doorbell		
Colour		White
Wall mounted		No
Frequency / Wireless Range*		868MHz / 150m
Audible Range (Volume)		60m (80dB)
Melodies		4
Sound		Internal Siren
Alarm Time (minutes)		2 (Internal Siren Mode)
Visual Alerts		LED Indicator
Power		Mains Power: 100-240V 50-60Hz 300mA
Maximum Device Capacity		2 x Wireless Push Button/Wireless Motion Sensor/Wireless Door and Window Sensor
Factory Reset		Yes
Operating Temperature/Storage Temperature		0°C to +40°C/-20°C to +60°C
Dimensions (mm) / Weight (g)		110 (h) x 70 (w) x 64 (d) / 150 (g)

Wireless Push Button		
Colour		White
Wall mounted		Optional
Screwless mounting option (Sticky pads)		Yes
Frequency / Wireless Range*		868MHz / 200m
Visual Alerts		Confidence Light
Power		Battery: 1 x CR2032 (3V) - (included)
Battery Life (Years)		2
Battery Features		Low Battery Indicator / Easy Open Battery Compartment
Push Button Design		Portrait
Push Name Plate		No
IP Rating		IP55
Operating Temperature/Storage Temperature		0°C to +40°C/-20°C to +60°C
Dimensions (mm) / Weight (g)		30 (h) x 70 (w) x 16 (d) / 23.5 (g)
Fixings		Brackets / Rawl Plugs / Screws / Sticky Pads

Pack		
EAN Code		5004100965363
Pack Dimensions (mm) / Weight (g)		216 (h) x 150 (w) x 88 (d) / 370 (g)
Standard Pack Quantity		4

\* Measured in open field conditions, walls, ceilings and metal structures will reduce the maximum range.