


Our Strongest
Single Component
Fixing

LINIAN
FASTER. SAFER. SIMPLER.

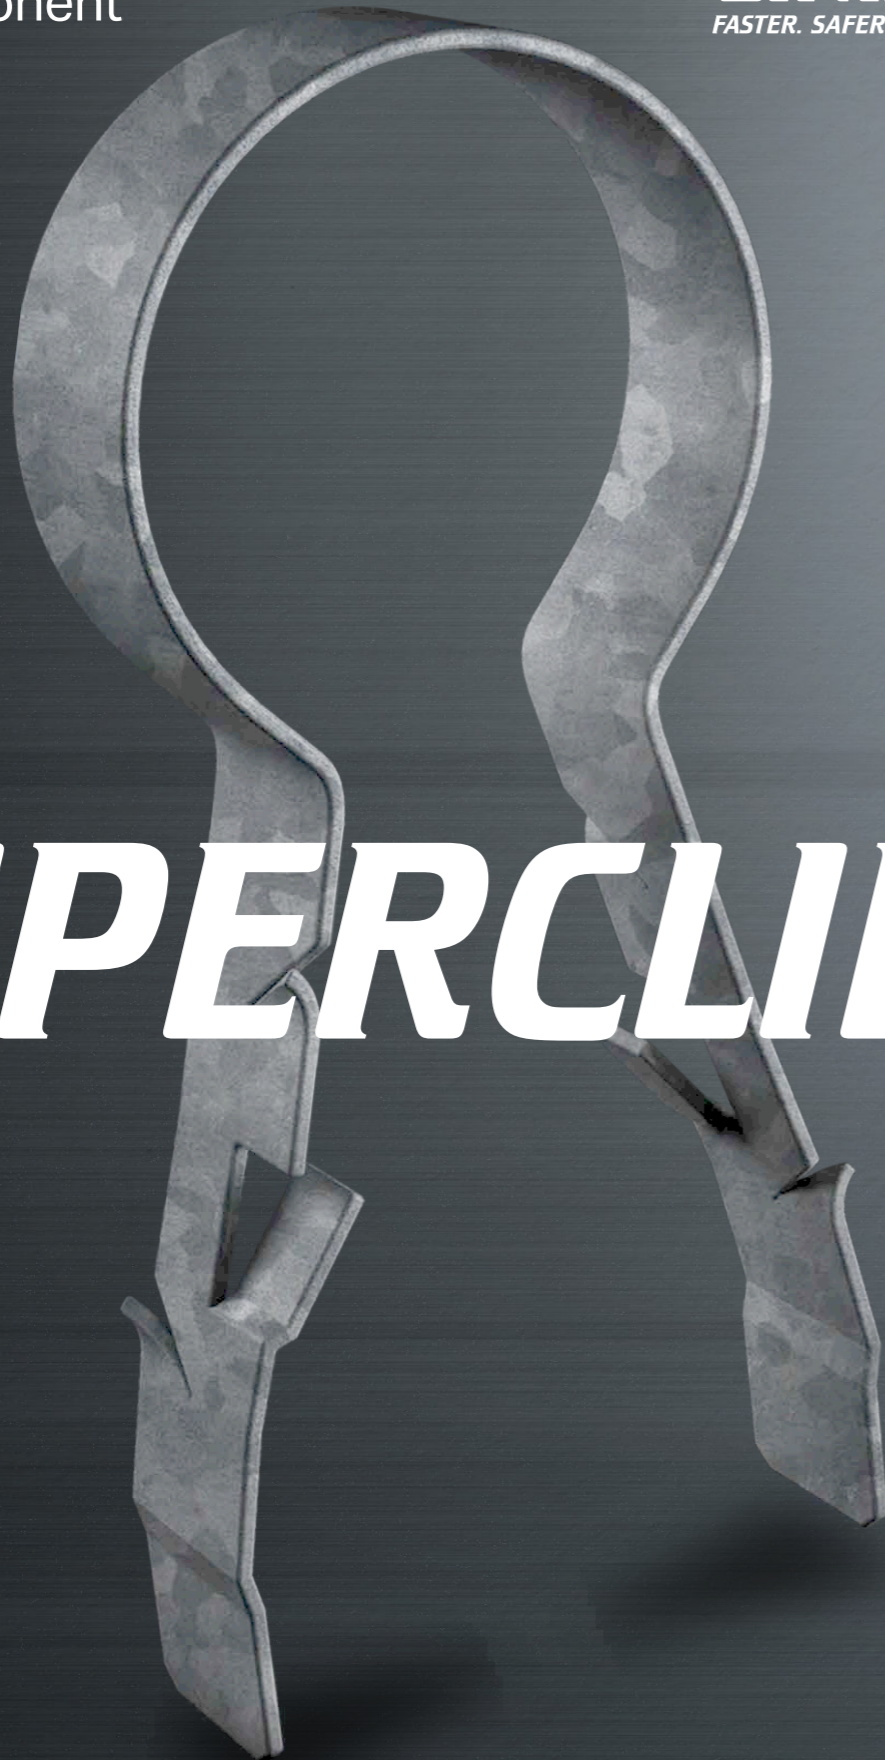

SUPERCLIP™

- SWA cables, PVC/metal conduit
- Bunched cables
- Anchor fixings for wire etc
- Corrosion Resistant – UV Stable
- Can be used with steel cable ties

For cables
& conduits
12-25mm

44kg
Tensile Load

SUPERCLIP™

Suitable For SWA Cable, Conduit and bunched cables for neat cable installation

Anchor fixings for wire and bunched cable


70% quicker to install than traditional methods

90 & 120 minute fire resistant, meeting BSi and DIN classifications

Corrosion resistant and UV stable, suitable for indoor and outdoor use

18th Edition and Fire-Rated Cable Fixings. Safe and Compliant

No need for conduit saddles

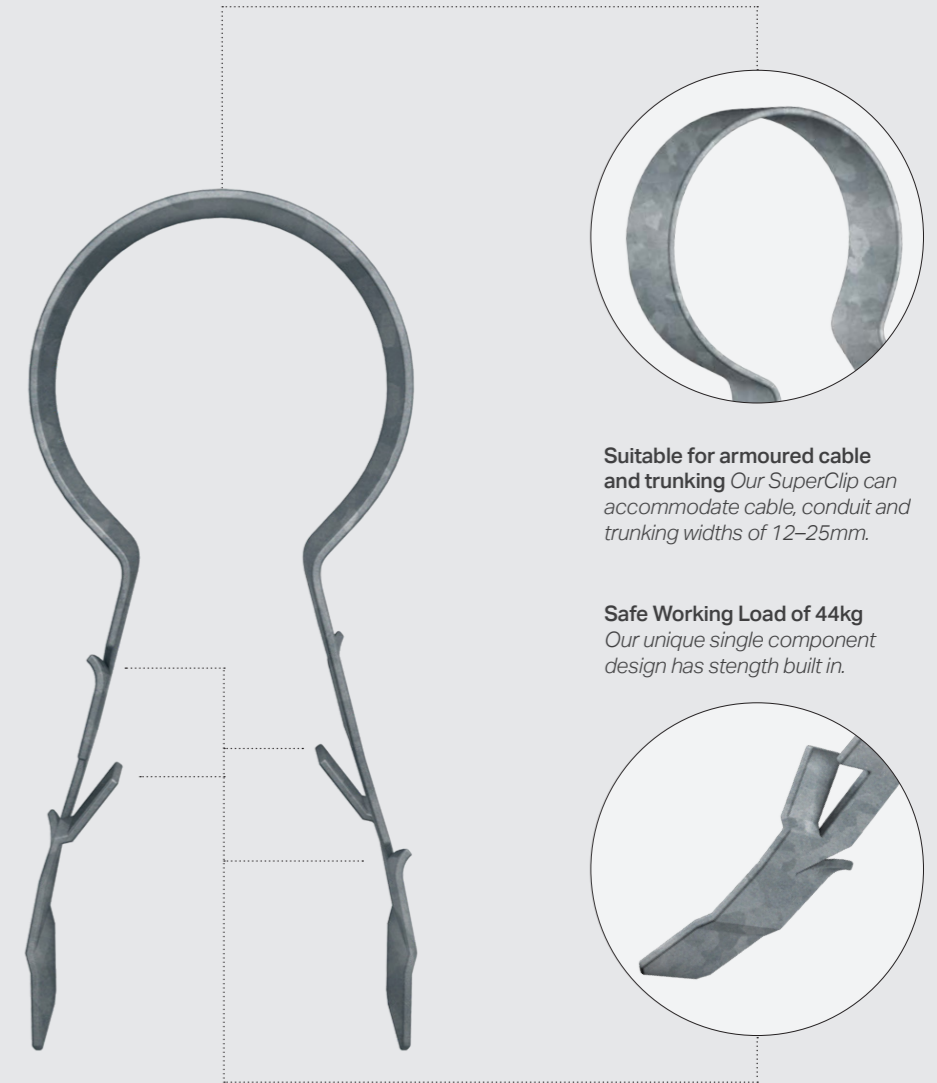

Suitable for armoured cable and trunking Our SuperClip can accommodate cable, conduit and trunking widths of 12–25mm.

Safe Working Load of 44kg Our unique single component design has strength built in.


FAST AND EASY TO INSTALL

No need for plugs, screws, washers, conduit saddles or plastic/aluminum cleats – just drill your hole, slide our clip over the cable, and push it into the wall.


Drill a hole in your substrate. We suggest a Ø10mm hole at a depth of 40mm.



Slide the clip over the cable. Make sure it's seated in the rounded area of the clip.

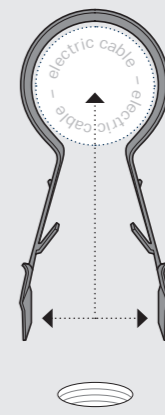

Compress and push it home. Pinch the legs together and push into the hole by hand.

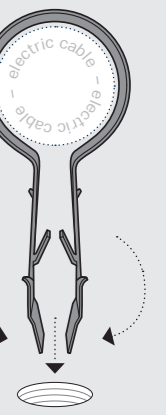

THE INDUSTRY STANDARD

Fast becoming the industry standard – SuperClip™ meets all current industry regulations, and surpasses a few too.

British Standards:
– BS7671: Amendment 3
– BS7671: 18th Edition 2018
– BSEN50200 PH120
– BS8519: 2010

European Standards:
– DIN 4102-12 E90

12mm — 25mm
SWA cables, PVC metal conduct

Versatile
Can hold cable conduit and armoured (SWA) from Ø12mm up to Ø25mm. Available in a variety of colours including Red, Black, White or Galvanised

