


## INDUSTRIAL FUSE-LINKS WITH KNIFE BLADE CONTACTS

LSPN


### 500 Volt NH-System Fuse-Links with Knife Blade Contacts to IEC60269-2

Rated voltage: 500V a.c. Breaking range and utilization category: gG Rated breaking capacity: 120kA at 500V a.c.

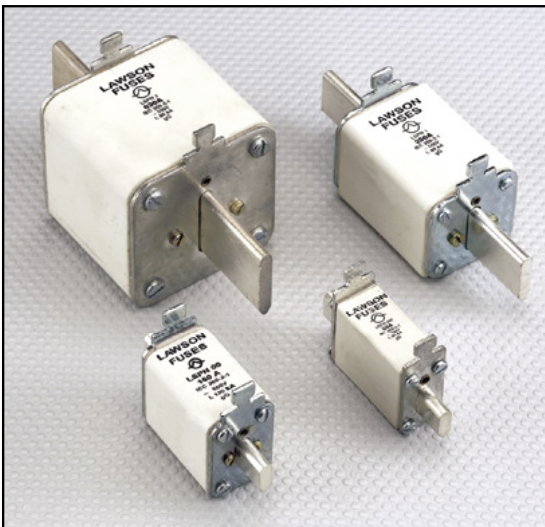

#### Current ratings and principal dimensions

Size	Type Reference	Current Rating (A)	Dimensions (mm)							
			a1	a2	a3	a4	b	e1	e2	
000	LSPN	6 10 16 20 25 32 40 50 63	78,5	54	45	49	15	39	29	
00	LSPN	10 16 20 25 32 40 50 63 80 100	78,5	54	45	49	15	38	29	
		125 160						45	29	
0	LSPN	32 40 50 63 80 100	125	68	62	68	15	38	29	
		125 160						45	29	
1	LSPN	32 40 50 63 80 100 125 160	135	75	62	68	20	45	29	
		200 250						50	44	
2	LSPN	40 50 63 80 100 125 160 200 250	150	75	62	68	25	50	44	
		315 250 400						58	50	
3	LSPN	315 400 500 630	150	75	62	68	32	73	71	



#### Also available.

1. Ranges of Fuse-Links for motor circuit and semi conductor protection are also available
2. A range of Fuse-Bases and accessories are also available.

## D FUSE-LINKS

TYPE LD

### 500 Volt Diazed Fuse-Links to IEC60241 • IEC60269-3 • DIN-VDE 0636 Part 31

Rated voltages: 500V a.c. Breaking range and utilization category: gG Rated breaking capacities: 50kA a.c.



#### Current ratings and principal dimensions

List References		Current Rating (A)	Principal Dimensions	
Slow Acting	Quick Acting		Length mm	Diameter mm
LD12	LD12Q	2 4 6 10 16 20 25	50	12
LD22	LD22Q	2 4 6 10 16 20 25	50	22
LD27	LD27Q	35 40 63	50	27
LD37	LD37Q	80 100	63	37
LD51	-	125 160 200	66	51

#### Also available.

1. Ranges of Fuse-Links for motor circuit and semi conductor protection are also available
2. A range of Fuse-Bases and accessories are also available.

## DO FUSE-LINKS

TYPE LNZ

### 400 Volt Neozed Fuse-Links to IEC60269-3 • DIN-VDE 0636 Part 41

Rated voltages: 400V a.c., 250V d.c. Breaking range and utilization category: gG Rated breaking capacities: 50kA a.c., 8kA d.c.



#### Also available.

1. Ranges of Fuse-Links for motor circuit and semi conductor protection are also available
2. A range of Fuse-Bases and accessories are also available.

#### Current ratings and principal dimensions

List References		Current Rating (A)	Principal Dimensions	
400V a.c.			Length mm	Diameter mm
LNZ11-400		2 4 6 10 16	36	11
LNZ15-400		20 25 35 50 63	36	15
LNZ22-400		80	43	22