


# Product Datasheet

## Alkaline

6LR61 Pro Power



6LR61PPG

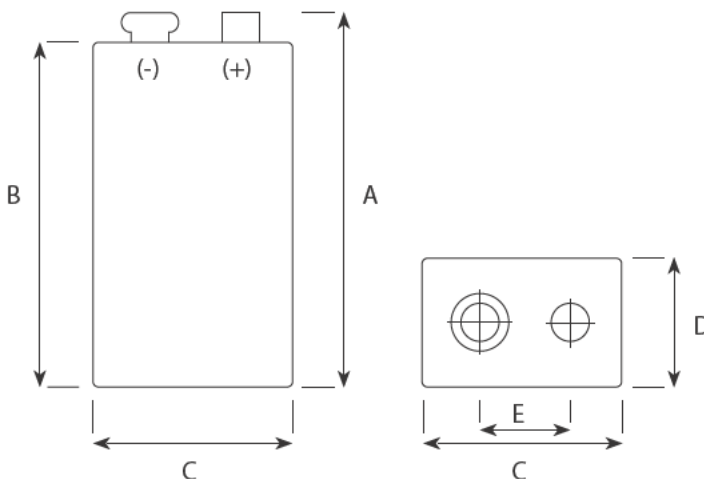

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	48,5	46,5
B	46,4	—
C	26,5	24,5
D	17,5	15,5
E	12,95	12,45

<b>Name</b>	9V / 6LR61 / 6AM6 / MN1604 / 1604A
<b>Made in</b>	Belgium
<b>Type</b>	Alkaline Foil
<b>Nominal Voltage</b>	9 Volt
<b>Electrolyte</b>	Potassium Hydroxide
<b>Average weight</b>	43 g
<b>Storage temp. range</b>	+15°C (59°F) ~ +25°C (77°F)
<b>Operating temp. range</b>	-20°C (-4°F) ~ +55°C (131°F)
<b>Heavy metals</b>	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
<b>Compliant to</b>	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC Nordic Ecolabel
<b>Recommended cut off voltage</b>	5,4V per battery

For more information:

[www.panasonic-batteries.com](http://www.panasonic-batteries.com)

**Panasonic**

# Typical discharge values

## 6LR61PPG

