


Product Datasheet

Alkaline

LR14 Pro Power



LR14PPG

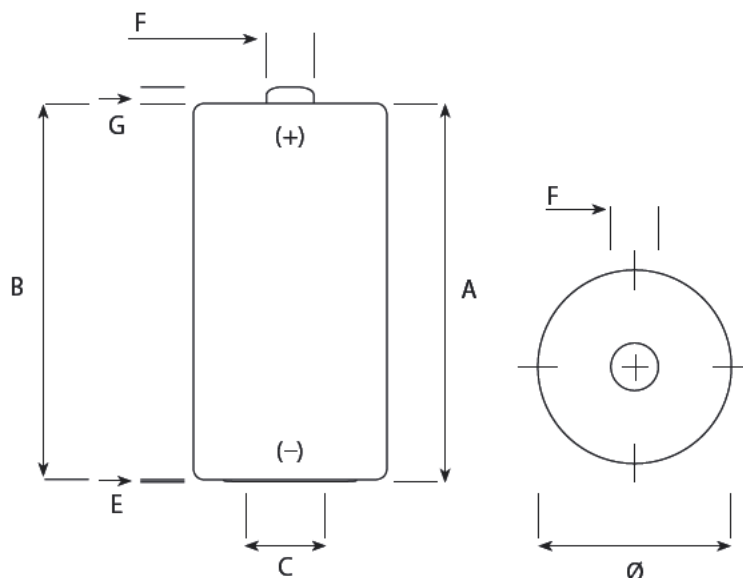

| IEC Dimensions (mm) | | |
|---------------------|---------|---------|
| Dimension | Maximum | Minimum |
| A | 50,0 | — |
| B | — | 48,6 |
| C | — | 13,0 |
| E | 0,9 | — |
| F | 7,5 | — |
| G | — | 1,5 |
| Ø | 26,2 | 24,9 |

| | |
|------------------------------------|--|
| Name | LR14 / L / C / AM2 / BABY / MN1400 / 14A / 14AC |
| Made in | Belgium |
| Type | Alkaline Foil |
| Nominal Voltage | 1,5 Volt |
| Electrolyte | Potassium Hydroxide |
| Average weight | 67 g |
| Storage temp. range | +10°C (50°F) ~ +25°C (77°F) |
| Operating temp. range | -20°C (-4°F) ~ +55°C (131°F) |
| Average Impedance | +/- 100 m-Ohm @ 1kHz fresh |
| Heavy metals | No added mercury (Hg), Cadmium (Cd) or Lead (Pb) |
| Compliant to | IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EC directive 91/157EC & 98/101EC Nordic Ecolabel |
| Recommended cut off voltage | 0,8V per cell (0,9V per cell for multi series usage) |

For more information:


www.panasonic-batteries.com

Panasonic


Typical discharge values

LR14PPG


Portable lighting
4m/h 8h/d 3,9 ohm end 0,9V

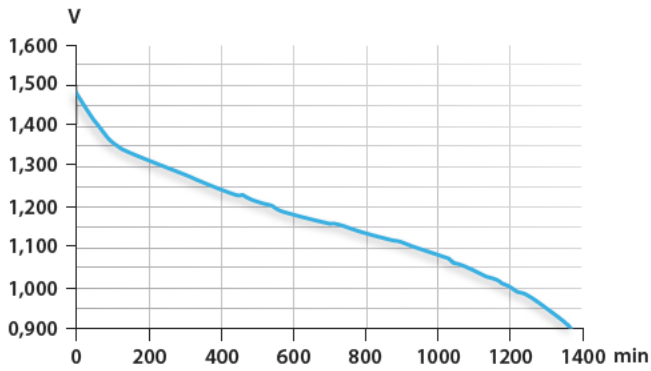

Portable stereo
2h/d 400 mA end 0,9V

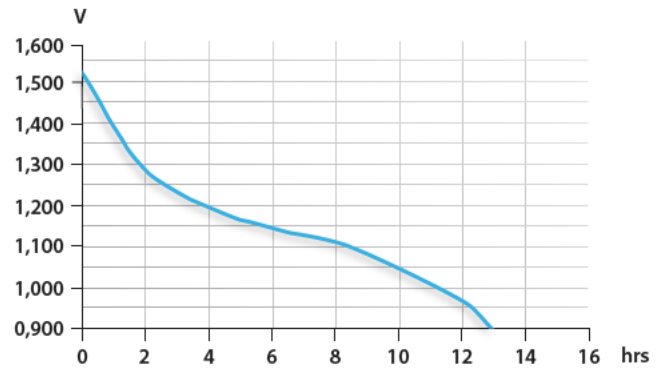

Toy
1h/d 3,9 ohm end 0,8V

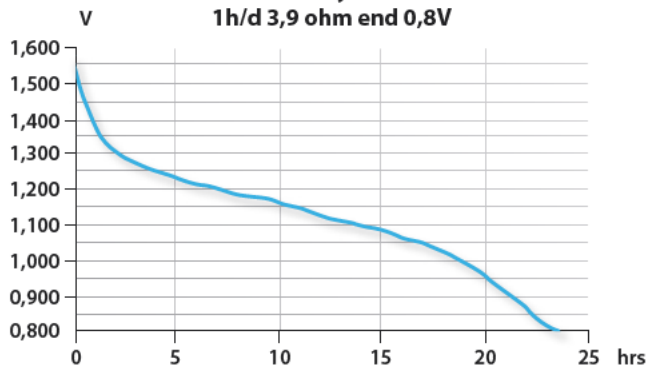

Radio
4h/d 20 ohm end 0,9V

